


SplashBotix Low Voltage Lighting Cabinet

Standard controls specially engineered for the pool, play deck and show fountain industry

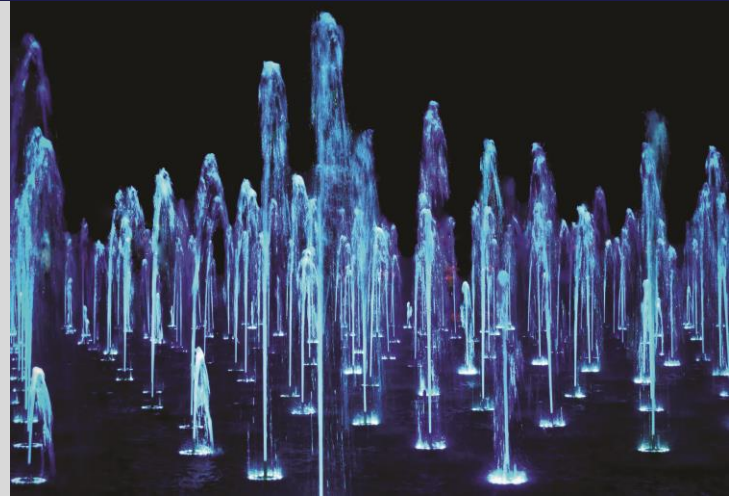

Designed with Designers in Mind

SplashBotix standardized controls are specially engineered with show fountain and water feature designers in mind.

Our comprehensive standard controls platform eliminates the need for patchwork, often temperamental, controls systems, ensuring long-lasting, smooth operations.

The SplashBotix Low Voltage Lighting Cabinet features a brushed 316 stainless steel construction with a quarter-turn pad-lockable latch and integrates seamlessly with the SplashBotix MCP.

Its 7-day astronomical clock enables stand-alone operations and works in conjunction with a daylight photoelectric sensor, which comes standard with each unit.

Capable of controlling up to 10 pool-rated low-voltage lighting transformers, the cabinet is supplied with 5 low-voltage lighting transformers.

Its user interface is comprised of keyed switches for facilitating local and remote operations as well as mode control.

Benefits

- Standardized for reliable, smooth operations
- Can operate from remote signal generated from SplashBotix MCP
- 5 low voltage transformers included
- High quality 100% 316 stainless steel construction

Specifications

Part No	059612V001
Weight	13.6 kg / 30 lbs estimated
Dimensions (H x W x D)	457 mm x 508 mm x 152 mm / 18" L x 20" W x 6" H
Enclosure Material	316 Stainless Steel
Enclosure Finish	Brushed 316 Stainless Steel
Latch	Quarter-Turn (Pad-Lockable)
Agency Listings & Approvals	UL 508A
Incoming Power	120 VAC/220 Single Phase
Full Load Current	25 FLA
Power Consumption Source	20 AMPS
Control Power	24 VDC
Operational Environment	Indoors
Nominal Operating Temperature	Indoors below 0°C to 40°C



**Low Voltage
Lighting Cabinet**

14121 W Highway 290 STE 4 | Austin, TX 78737
Tel: 512-894-3534 | info@splashbotix.com | splashbotix.com