


SplashBotix Secondary DMX Lighting Control Cabinet

Standard controls specially engineered for the pool, play deck and show fountain industry

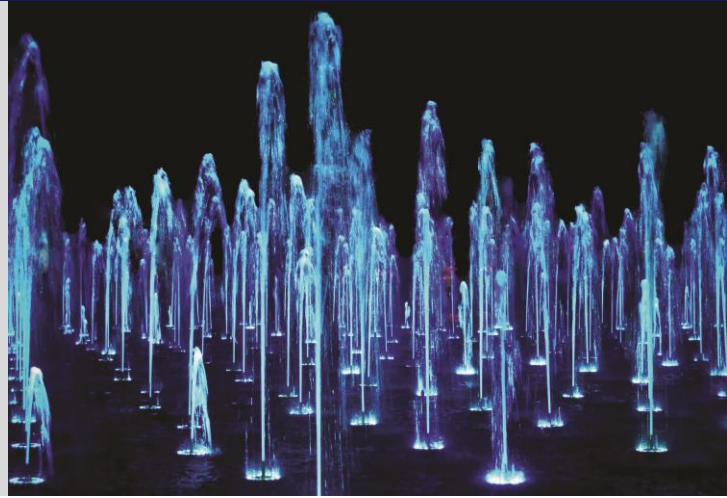

Designed with Designers in Mind

SplashBotix standardized controls are specially engineered with show fountain and water feature designers in mind.

Our comprehensive standard controls platform eliminates the need for patchwork, often temperamental, controls systems, ensuring long-lasting, smooth operations.

The SplashBotix Secondary DMX Control Cabinet features a brushed 316 stainless steel construction with a quarter-turn pad-lockable latch. It is designed to expand the number of fixtures which can be controlled by the Primary DMX Cabinet.

DMX 512A is the standard for most lighting fixtures and fountain movers in the water feature and theater market, and most notably the SplashBotix SplashValve.

The Secondary DMX Cabinet is equipped with a sophisticated insulation monitor that can detect dangerous and damaging leakage current that may otherwise go undetected by a standard GFCI, bringing a whole new level of protection to your equipment.

Specifications

Part No	083002J001
Weight	140 kg / 300 lb
Dimensions	945 mm x 474 mm x 1443 mm 37.19" L x 18.66" W x 56.81" H H316 Stainless Steel
Max Wattage	3840 W
Incoming Power	120 VAC
Full Load Current	42.1 FLA
Max DMX Addresses	512

Benefits

- Standardized for reliable, smooth operations
- High quality 100% 316 stainless steel construction
- Safety features bring added protection against potential leakage current
- Integrates seamlessly with SplashBotix MCP
- Universally compatible with all DMX 512A supported devices
- Supports RDM (Remote Device Management)



Secondary DMX
Lighting Control
Cabinet

14121 W Highway 290 STE 4 | Austin, TX 78737
Tel: 512-894-3534 | info@splashbotix.com | splashbotix.com